


# F06-GYXTW-M5

6 HILOS L TUBE 50MIC OUT WBLOCK ARMADA

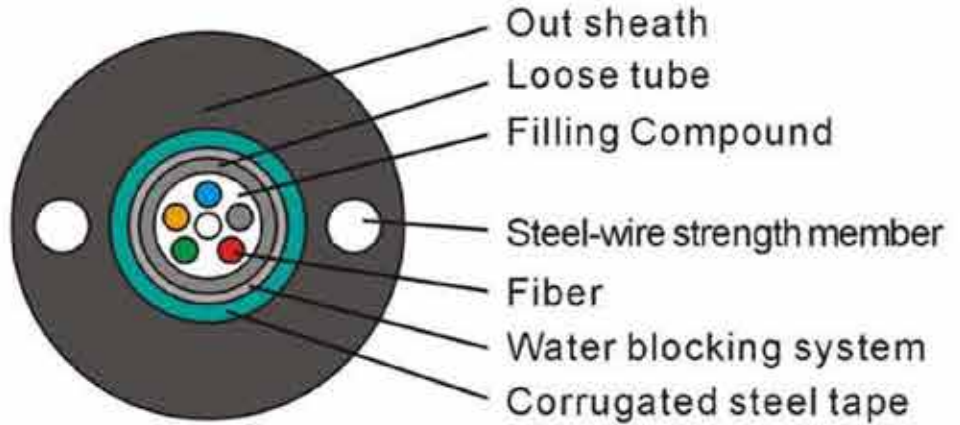

## Especificaciones Técnicas

### Technical Parameters:

Cable Count	Out sheath Diameter (MM)	Weight (KG)	Minimum allowable Tensile Strength (N)		Minimum allowable Crush Load (N/100mm)		Minimum Bending Radius (MM)	
			Short term	Long term	Short term	Long term	Short term	Long term
2	8.3	78.0	1500	600	1000	300	20D	10D
4	8.3	78.0	1500	600	1000	300	20D	10D
6	8.3	78.0	1500	600	1000	300	20D	10D
8	8.3	78.0	1500	600	1000	300	20D	10D
10	8.3	78.0	1500	600	1000	300	20D	10D
12	8.3	78.0	1500	600	1000	300	20D	10D